


The D20 is a single reed surface contact. The operating gap is approx. 20mm – but this may be affected if mounted near ferrous materials.

## INSTALLATION

Connect the reed/alarm wires to the nickel terminals (T2 & T4). Use the spare unconnected brass terminals (T1, T3 & T5) for any additional wiring required.

Fix the magnet to the door and the contact to the frame using the fixings provided. Ensure both halves align correctly for best operation.

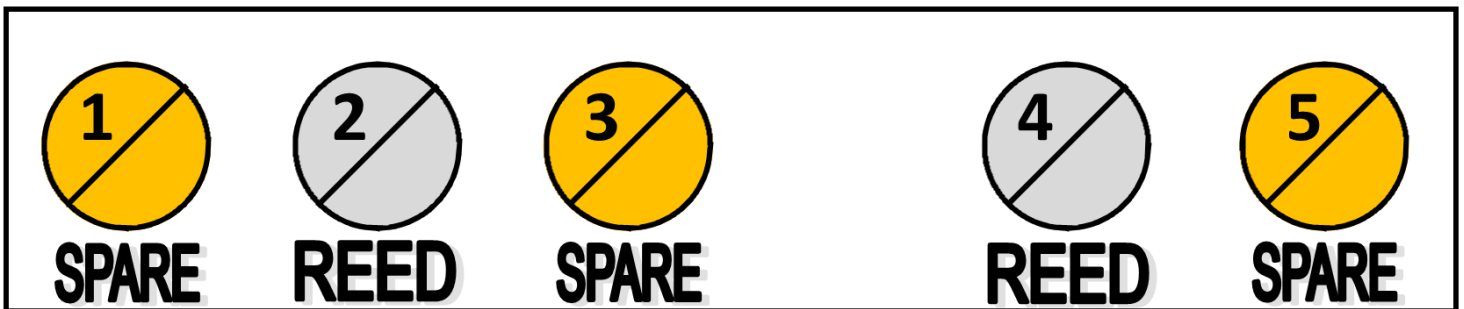

## NOTES

The reed is rated 500mA max AC, 500mA max DC