


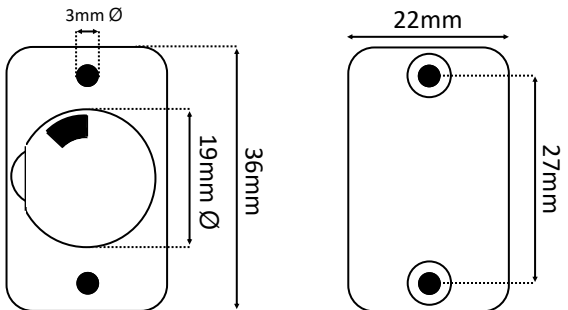
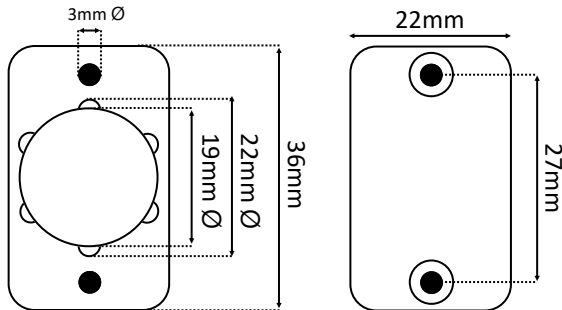
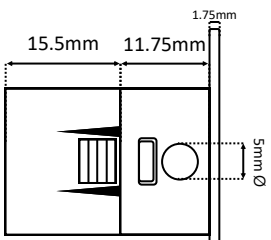









FRONT/ BACK	<p style="text-align: center;"><b>CONTACT</b></p> 	<p style="text-align: center;"><b>MAGNET</b></p> 	<p><b>DESCRIPTION</b></p> <p>Grade 3, Class II 4 terminal flush contact +resistors. Rectangular plate. Single reed, normally closed. <i>(complete circuit when magnet present).</i></p> <p><b>VARIANTS</b></p> <p>XA41MULTIB—4T flush contact, rect. plate, brown +resistors.</p> <p><b>ACTIVATION</b></p> <p>Reed switch, ~14mm operating gap.</p> <p>Selectable resistor modules: EOL: 1k, 2k2, 4k1, 4k7, 5k6, 10k. ALM: 1k, 2k2, 4k1, 4k7, 5k6, 6k8, 10k.</p> <p>Microswitch tamper.</p> <p>Magnetic tamper reed switch.</p> <p><b>WIRING</b></p> <p>As marked on PCB. Use * terminals for supervised loop.</p> <p><b>MATERIALS</b></p> <p>Plastic casing. Ferrite/Alnico V magnet. Rhodium reed.</p> <p><b>TEMPERATURE RANGE</b></p> <p>-40 to +50 degrees Celsius.</p> <p><b>ELECTRICALLY RATED AS FOLLOWS</b></p> <p>500mA Max DC. 500mA Max AC.</p> <p>1 – 100v DC. 125v AC Max.</p>
SIDE / END	 	 	
PHOTO	 		
COVER / PCB		  	

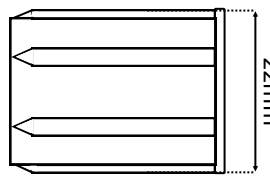

**KNIGHT**  
FIRE & SECURITY

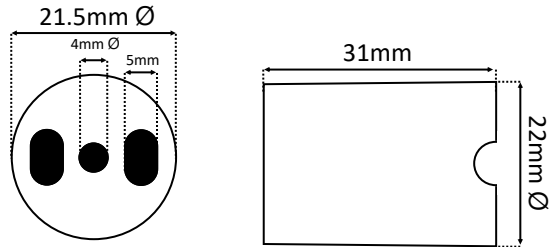Unit 84 Seawall Road Ind. Estate  
Cardiff UK CF24 5TH  
Tel: +44 (0) 2920 488 129  
Fax: +44(0) 2920 489 132

Drawing #: XA41MULTI  
Drawn: Gareth Carpenter  
Date: 01/09/2017  
Revision: 1

All dimensions in mm  
Do not scale



© Knight Fire & Security Products Ltd  
All cases of infringement will be pursued.