

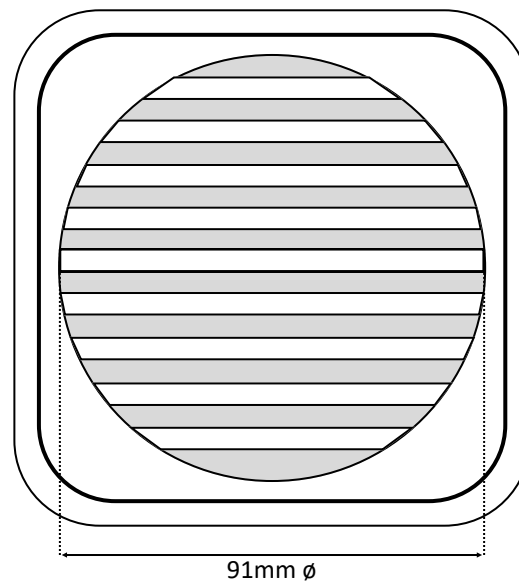


TOP/
BOTTOM

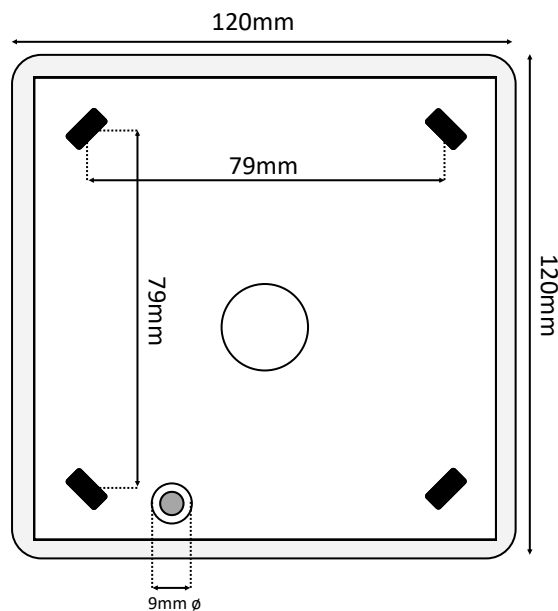

SIDE/
PHOTO

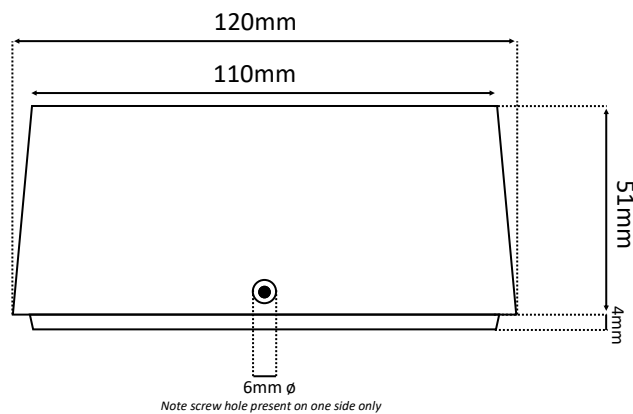

DESCRIPTION

Grade 3, Class II internal sounder. 16 Ohm. Tampered.

VARIANTS

I10 - Grade 1, Class II internal sounder. 16 Ohm.

I40 - Grade 3, Class II dual tone sounder. 16 Ohm. Tampered.

ACTIVATION

Panel output to drive speaker.

M/switch tamper - trigger on lid lift or removal from surface.

WIRING

PCB	TAMPER SWITCH
Red/Black	SPEAKER INPUT

MATERIALS

ABS casing.

87mm Mylar speaker - 16 Ohm, 12 Watt.

TEMPERATURE RANGE

-40 to +50 degrees Celsius.

ELECTRICALLY RATED AS FOLLOWS

10-15V DC

SOUND OUTPUT

0.25 - 8Khz freq. range.

550Hz \pm 110Hz resonance.

97dB output.



KNIGHT
FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate
Cardiff UK CF24 5TH
Tel: +44 (0) 2920 488 129
Fax: +44(0) 2920 489 132

Drawing #: I20
Drawn: Gareth Carpenter
Date: 01/06/2017
Revision: 1

All dimensions in mm
Do not scale



© Knight Fire & Security Products Ltd
All cases of infringement will be pursued.