


The PA2 is a double push panic button. The several versions are listed as below:

- PA2EW – Double End Push PA, White
- PA2ES – Double End Push, Steel fascia, Black body
- PA2SW – Double Side Push, White
- PA2SS – Double Side Push, Steel fascia, Black body
- *All of the above may also come in \*NL (non-latching) variants*

No matter the configuration, the internal wiring and installation remains the same.

### DIAGRAM

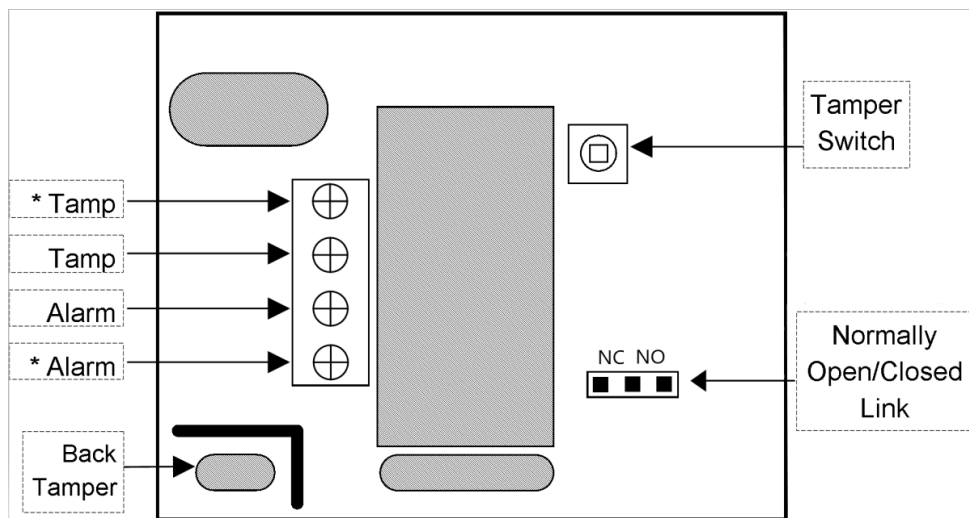

### WIRING

**Traditional (4 Wire)** –Place a single link over the NO or NC pins depending on the desired operation. Use all 4 terminals as marked.

- Attach your tamper wires to the tamper terminals.
- If the lid is removed the tamper will activate.
- Attach Alarm wires to the Alarm Terminals.
- Once the button is pressed in the circuit will be broken.

### INSTALLATION

- Screw the unit base to mounting surface.
- Carefully fit the lid, ensuring no wires are snagged. Screw down.
- Operation: Push both buttons inwards. The microswitch will only operate when both buttons are pushed simultaneously.
- Latching units may be reset by using the reset key (supplied).