



Fig. 1- KP4 Series Panic Button Range



Fig. 2 – KP5 Series Panic Button


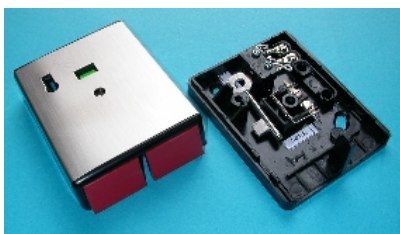


Fig. 3 – KP6(S) Series Panic Button

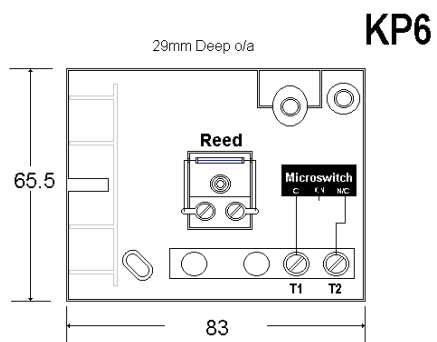

	Model		
	KP4	KP5	KP6
Grade 2 Class II	●	●	-
Grade 3 Class II	-	-	●
Reed NO/NC	●	●	●
Latch	●	-	●
Non Latch	-	●	-
Metal Key	●	●	●
Spare Keys to order	●	●	●
Micro-Switch CIO	-	-	●
Plastic	●	●	●
St/Steel (S)	●	-	●
Brass (B)	●	-	●
Knockouts End	1	1	1
Knockouts Back	-	-	-
Knockouts Side	-	-	-

	Length	Width	Height
Dimension	83	66	29mm
Dimension KP6	83	66	29mm

Options

Smooth Buttons	●	●	●
Ridged Buttons	●	●	●

**Description:**

Double End Push Panic Button

**Materials:**

ABS / Acetal

**Temperature Range:**

-40°C - +50°C

**Tampers:**

Stainless Steel

Microswitch (KP6)

**Switching Current**

500mA Max DC

500mA Max AC

**Contact Material:**

Rhodium

**Indicator:**

Flag Type

**Voltage Range:**

1 – 100v DC

125v AC Max

**Keys:**

Metal Key located inside

**Colours:**

Plastic - White (No Suffix)

Plastic - Black (Suffix B)

**Finishes:** (See table)

Plastic, Brass (B), Stainless Steel (S)

**KNIGHT**

FIRE & SECURITY PRODUCTS LTD

**email:** [info@knightplastics.com](mailto:info@knightplastics.com)

Unit 84 Seawall Road Ind. Estate  
Cardiff UK CF24 5TH

**Tel:** 0 (00 44) 29 20 48 81 29

**Fax:** 0 (00 44) 29 20 48 91 32

Drawing No: **KP4-6 Series  
Panic Button**

Drawn:

*Chris Moorman*

Date:

11/02/08

All units in mm  
Do not scale



© Knight Fire & Security Products Ltd  
All cases of ™ Infringement will be pursued.