


The C01x range of contacts are normally closed roller shutter contacts. X denotes cable length as follows:

C010	0.5m fly lead
C011	1m fly lead
C012	2m fly lead
C01x	Xm fly lead (where x is the fly lead length in metres)

INSTALLATION:

Drill appropriate fitting holes for both contact & magnet in the mounting surfaces. Wire the contact as follows:

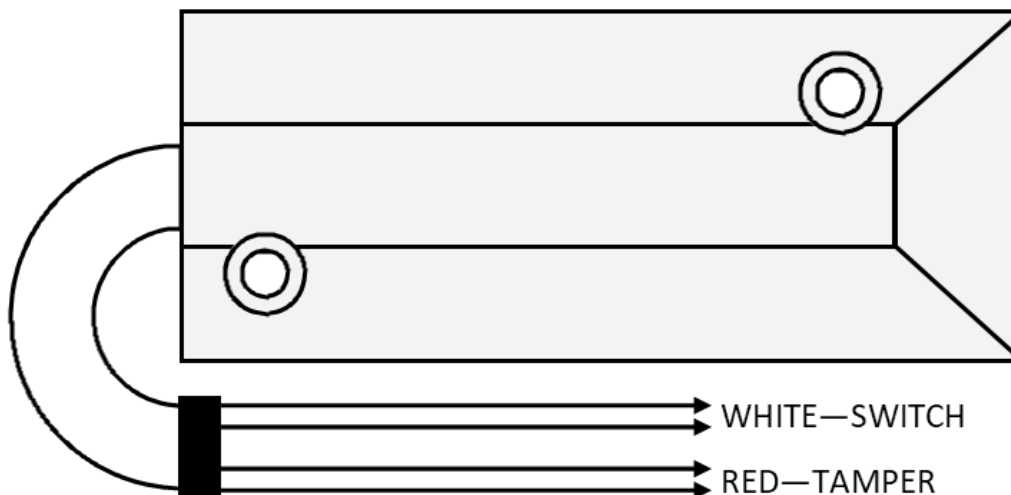

Wire as appropriate for your receiving equipment. Red tamper wires are always a closed circuit. White switch wires will form a closed circuit in presence of the corresponding magnet, opening when the magnet moves away.

When wiring is to the desired specification, fit the contact to the mounting holes using the screws provided. Ensure that contact & magnet align as well as possible to ensure reliable operation.

OPERATING GAPS:

Make:	55mm Approx
Break:	80mm Approx