

Resistor Combinations	
Specified by Panel Manufacturer	
1/. Reed <i>(Series Parallel)</i>	2/. EOL <i>(Series)</i>
1KR	1KR
2K2	2K2
4K7	4K7
4K7	2K2
4K7	6K8
8K2	8K2



Description:
Grade 2 Class III
Roller Shutter Contact
Potted - Single Reed

Operating Gap:
50 mm (Approx)

Materials:
Aluminium,
1000mm Armoured Cable

Magnets:
Ferrite or Alnico V

Contact Material:
Rhodium

Voltage Range:
1 – 100v DC
125v AC Max

Switching Current:
500mA Max DC
500mA Max AC

Temperature Range:
-40°C - +50°C

Resistor Combinations:
See Inset Panel
Call for options


Fixing Screws Provided

Sealed against outside attack.

●● To fit using both resistors, twist black & grey wires together & connect to your alarm, then connect the red wire to your second alarm terminal. This gives 8K2 when reed is open, (Magnet away), and 4K1 when magnet is in place, (Closed circuit).

● The operating gap is 50mm.

White wires are the tamper loop
The magnet side needs to be fitted 50mm away from the reed side.

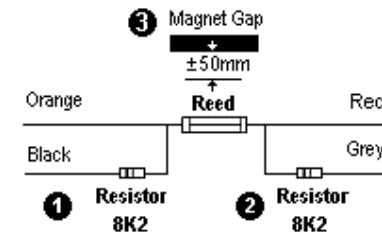

KNIGHT

FIRE & SECURITY PRODUCTS LTD

<mailto:info@knightfireandsecurity.com>

Unit 84 Seawall Road Ind. Estate
Cardiff UK CF24 5TH

Tel: 0 (00 44) 29 20 48 81 29

Fax: 0 (00 44) 29 20 48 91 32

Drawing No: PDF10C8K2

Drawn: Chris Moorman

Date: 05/02/09

All units in mm
Do not scale



© Knight Fire & Security Products Ltd
All cases of TM Infringement will be pursued.