


Magnet

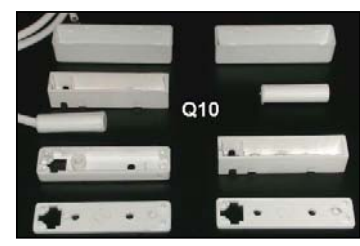

Description: Grade 2 Class III
4 Core Flush with Surface Mount Kit,
Single Reed

Operating Gap:
14mm (Approx.)

Material:
High Impact Polystyrene

Magnet:
Ferrite or Alnico V

Contact Material:
Rhodium

Voltage Range:
1 – 100v DC
125v AC Max

Switching Current:
500mA Max DC
500mA Max AC

Temperature Range:
-40°C to +50°C

Fixing Screws Provided

KNIGHT
FIRE & SECURITY PRODUCTS LTD
<mailto:info@knightfireandsecurity.com>

Unit 84 Seawall Road Ind. Estate
Cardiff UK CF24 5TH
Tel: 0 (00 44) 29 20 48 81 29
Fax: 0 (00 44) 29 20 48 91 32

Drawing No: **Q10**
Drawn: *Chris Moorman*
Date: 04/09/09

All dimensions in mm
Do not scale



© Knight Fire & Security Products Ltd
All cases of ™ Infringement will be pursued.