



KNIGHT FIRE & SECURITY PRODUCTS LTD
Unit 84, Seawall Road Industrial Estate
Tremorfa, Cardiff CF24 5TH
Tel: 029 2048 8129
Fax: 029 2048 9132
<mailto:info@knightfireandsecurity.com>

Surface Balanced Magnetic Contact 1KR x 2 CE

Part Code: XE90A1KR



Security Grade 3

Environmental Class 3

Manufactured to EN50131

Sealed against outside attack. Magnetically balanced to show that an outside magnet has been introduced.


Can be used with just the reed switch and no resistors – connect the yellow wire and the red wire, however the unit will be Grade 2.



❶ To include 1 resistor, twist the red & white wires together to link, then connect the yellow wire.

❷ To include 2 resistors, twist the red & white wires together to link then connect the green wire.

Black and blue wires are the tamper loop

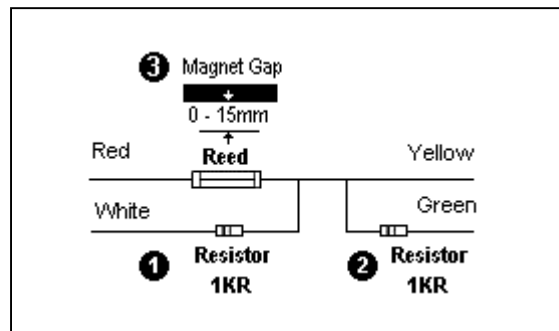

❸ The magnet side needs to be fitted 0 – 15mm away from the reed side; this is the most efficient position. Ensure when fitting the contact the green labels line up.