

PART CODE: D70

DESCRIPTION: IND. SURFACE CONTACT WITH

TAMPER & SPARE TERMINALS

SECURITY GRADE: 2 ENVIRONMENTAL CLASS: II

STANDARDS MET: EN50131-2-6:2008 <> PD6662:2017


D70 is a large surface contact with 2x spare terminals, suitable for wiring in single or shared zones.

Operating Gap: ~40mm


Note:

Mounting on metal surfaces reduces the operating gap, according to the metal type and thickness.

Single Zone Wiring (4-Wire):

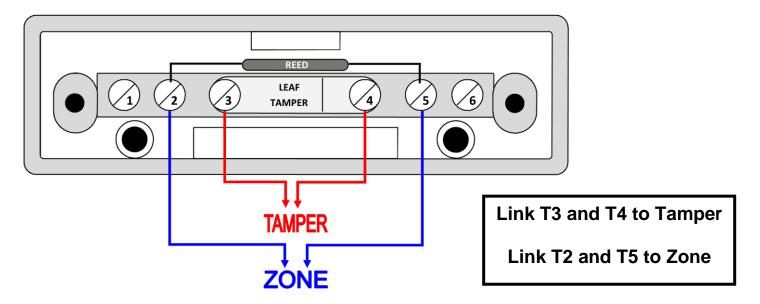


Shared Zone Wiring (4-Wire):

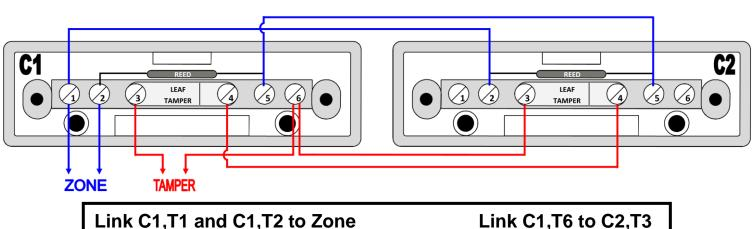

Link C1,T1 and C1,T2 to Zone Link C1,T3 and C1,T6 to Tamper Link C1,T4 to C2,T4 Link C1,T6 to C2,T3 Link C2,T2 to C1,T1 Link C2,T5 to C2,T5


Single Zone Wiring (Supervised):

Add EOL and Alarm resistors as per receiving equipment requirements.

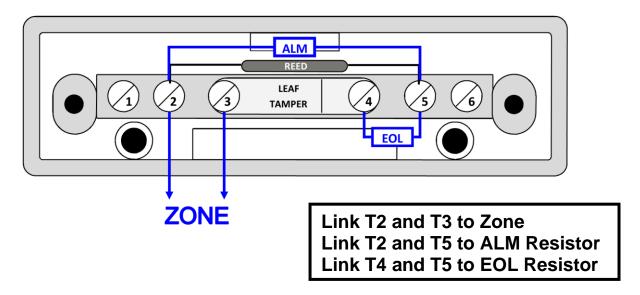

Shared Zone Wiring (Supervised):

Add EOL and Alarm resistors as per receiving equipment requirements.

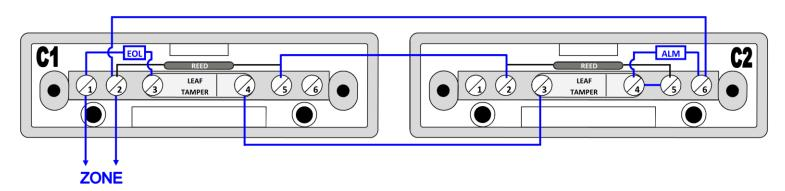

Link C1,T1 and C1,T2 to Zone Link C1,T1 and C1,T3 to EOL Resistor

Link C1,T2 to C2,T6

Link C1,T4 to C2,T3

Link C1,T5 to C2,T2 Link C2,T4 to C2,T5

Link C2,T4 and C2,T6 to ALM Resistor